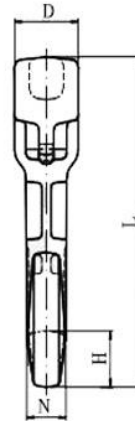
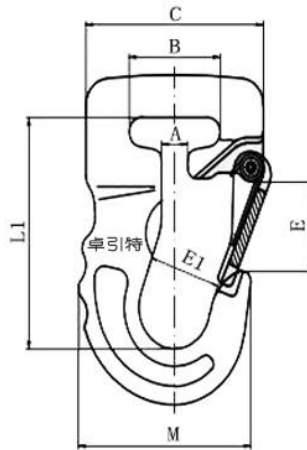







吊带钩

- 选用高强度高韧性特殊合金钢锻造而成，并经过热处理
- 比 80 级产品性能提升 25%
- 适用于 JB/T8521.2-2007 及 EN1492-2 : 2000+A1 : 2008 标准吊装带
- 每件按工作拉力的 2.5 倍进行验证测试
- 抽样进行 20000 次疲劳测试
- 对每一批次产品进行严格的抽样破断测试
- 进行 100%磁粉探伤
- 四倍安全系数
- 表面处理：喷塑



规格型号	颜色	额载	破断	尺寸 mm											自重
		T	T	A±1	B±1	C±1	D±1	M±1	N±0.5	E±0.5	E1±0.5	L±3	L1±3	H±1	kg
10-1055-1T		1	4	11.5	40	78	28	75.7	17	33	30	124	87	21	0.73
10-1055-2T		2	8	18.5	44.5	91	35	90	21	40	39	148	103	27	1.27
10-1055-3T		3	12	21.5	54	114	45	110	26	41	48	175	115	33	2.3
10-1055-4T		4	16	40.5	76	133	56	139	32	50.5	60	223.5	147	40.5	4.73
10-1055-5T		5	20	40.5	76	133	56	139	32	50.5	60	223.5	147	40.5	4.73