


Eye Selflock Hook

- Forged super alloy steel-Quenched and tempered
- Individually proof test at 2.5 times working load limit.
- Fatiuge tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection.
- Suitable for EN818-2 G80 chain.
- Safety factor 4:1
- Surface finish: Powder plastified.

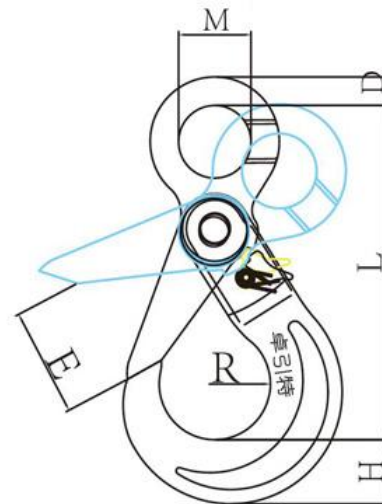


ITEM NO.	WLL	Breaking Strength	Size(mm)						Weight
	T		T	M±1	L±2.5	D±1	R±1	H±1	
8-081-06	1.12	4.48	22	110.5	10	34	19.5	28	0.5
8-081-08	2	8	25	136	12	46	24	34	0.8
8-081-10	3.15	12.6	32	171	15	56	30	44	1.43
8-081-13	5.3	21.2	40.5	208.5	19.5	69	40	52	2.86
8-081-16	8	32	56	257.5	22	86	50.5	60	5.64
8-081-20	12.5	50	64.5	275	27	100	55	81	7.6
8-081-22	15	60	70	320	30	98	67	82	13
8-081-26	21.2	84.8	80	363	34	110	75	110	18
8-081-32	31.5	126	105	472	45	166	97	168	44.5

G100 Eye Selflock Hook

- Forged super alloy steel-Quenched and tempered.
- 25% stronger than G80.
- Individually proof test at 2.5 times working load limit.

- Fatigue tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection.
- Suitable for G100 chain.
- Safety factor 4:1
- Surface finish: Powder plastified.

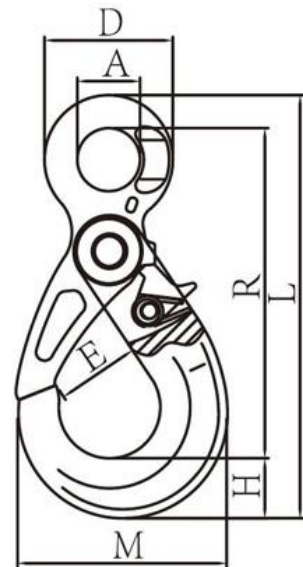

ITEM NO.	WLL	Breaking Strength	Size(mm)							Weight
	T		A±0.5	D±1	E±1	H±1	R±2	M±2	L±3	
10-1005-06	1.4	5.6	21	43	28	20	110	70	141	0.5
10-1005-08	2.5	10	27	51	35.5	26	137	90	175	0.9
10-1005-10	4	16	34.5	64.3	45	30	169	108	212.5	1.5
10-1005-13	6.7	26.8	40	80	53.5	40.5	209	138.5	270	2.7
10-1005-16	10	40	50	104	62	50.5	254	170.5	331	5.7
10-1005-20	16	64	60	120	76.5	62	277	192.5	369	7.9
10-1005-22	19	76	70	134	80	66	319.5	205	417	11.2