


Master Link

- Standard :EN1677-4(Supersedes DIN5688-3).
- Forged super alloy steel-Quenched and tempered
- Individually proof test at 2.5 times working load limit.
- Fatiuge tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection.
- WLL based on 0-45° for double legs G80 chain sling.
- Suitable for single or double legs G80 chain sling as per EN818-4
- For use with wire rope sling, refer to DIN3088 standard.
- For use with synthetic sling, refer to EN1492-1 standard.
- Safety factor 4:1
- Surface finish: Powder plastified.

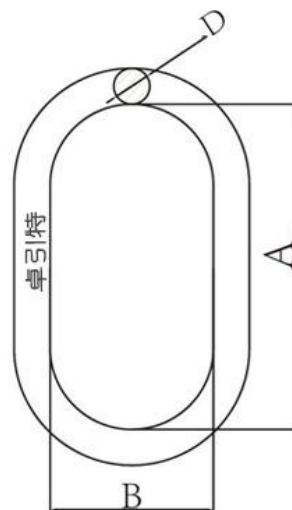


ITEM NO.	WLL	Breaking Strength	Chain diameter(mm)		Size(mm)			Weight
	T	T	For 1 leg	For 2 leg	A	B	D	kg
8-033-76	1.6	6.4	7	6	110	60	13	0.34
8-033-87	2.12	8.48	8	7	110	60	16	0.54
8-033-108	3.15	12.6	10	8	135	75	18	0.82
8-033-1310	5.3	21.2	13	10	160	90	22	1.5
8-033-1613	8	32	16	13	180	100	26	2.3
8-033-1816	11.2	44.8	18	16	200	110	32	3.95
8-033-2018	14	56	20	18	260	140	36	6.34
8-033-2220	17	68	22	20	300	160	40	8.96
8-033-2622	21.2	84.8	26	22	340	180	45	12.8
8-033-3226	31.5	126	32	26	350	190	50	16.55

8-033-3632	45	180	36	32	400	200	56	23.28
8-033-4036	56	224	40	36	430	220	63	32
8-033-72	63	252	45	40	460	250	72	45.76
8-033-80	85.46	341.84	-	45	500	270	80	62

G100 Master Link

- Forged super alloy steel-Quenched and tempered
- 25% stronger than G80.
- Individually proof test at 2.5 times working load limit.
- Fatigue tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection.
- Safety factor 4:1
- Surface finish: Powder plastified.

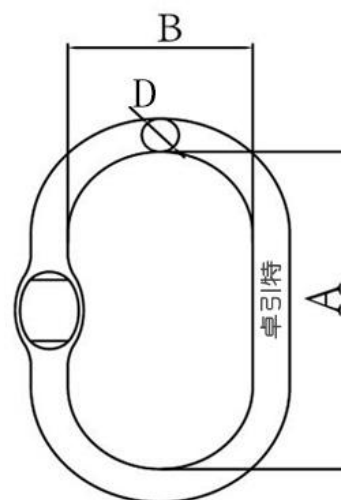

ITEM No.	WLL	Breaking Strength	Chain diameter(mm)		Size(mm)			Weight
	T	T	For 1 leg	For 2 leg	A	B	D	kg
8-1013-86	2.5	10	6/8	6	120	70	14	0.4
8-1013-108	4	16	10	8	140	80	17	0.8
8-1013-1310	7.5	30	13	10	160	95	22	1.5
8-1013-1613	10	40	16	13	190	110	28	2.5
8-1013-2016	17	68	20	16	240	140	34	5.2
8-1013-2220	28	112	22/26	20/22	250	150	42	7.7