


Clevis sling hook


- Forged super alloy steel-Quenched and tempered
- Individually proof test at 2.5 times working load limit.
- Fatiuge tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection.
- Suitable for EN818-2 G80 chain.
- Safety factor 4:1
- Surface finish: Powder plastified.

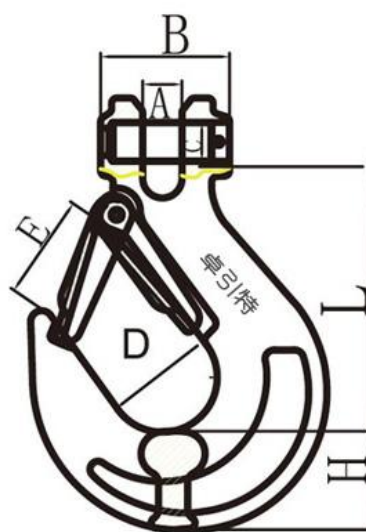

ITEM No.	WLL	Breaking Strength	Size(mm)						Weight
	T	T	A±0.5	B±1.5	D±1	H±1	L±2	E±2	kg
8-012-06	1.12	4.48	8	32	35	23	76	26	0.32
8-012-08	2	8	9.5	37	37	32.5	85.5	29	0.48
8-012-10	3.15	12.6	13	49	46	35	104	39	0.95
8-012-13	5.3	21.2	16.5	56.5	56	42.5	128	47	1.8
8-012-16	8	32	21.5	70.5	60	54	150	55	3.4
8-012-20	12.5	50	24	77	79	58	180	61	6
8-012-22	15	60	27	91	101	62	213	72	10.4
8-012-26	21.2	84.8	30	117	115	75	250	85	14.5
8-012-32	31.5	126	35	150	140	88	317	106	27

G100 Clevis Sling Hook

- Forged super alloy steel-Quenched and tempered.
- 25% stronger than G80.
- Individually proof test at 2.5 times working load limit.
- Fatiuge tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection.
- Suitable for EN818-2 G80 chain.
- Safety factor 4:1
- Surface finish: Powder plastified.

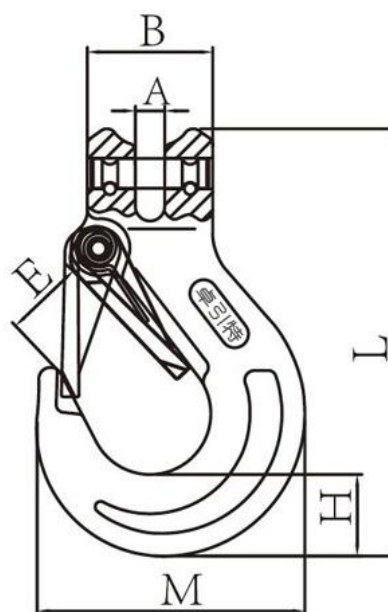

ITEM No.	WLL	Breaking Strength	Size(mm)						Weight
	T	T	A±0.5	B±1	E±1.5	H±1	M±2	L±2.5	kg
10-1004-06	1.4	5.6	7.5	32	18.5	21	68.5	109	0.33
10-1004-08	2.5	10	9.5	37	25	27.5	88	134	0.7
10-1004-10	4	16	12	48	28	33.5	105.5	161.5	1.3
10-1004-13	6.7	26.8	15	59	38	42	134	203	2.3
10-1004-16	10	40	17.5	70	44	50	160.5	248	3.6
10-1004-20	16	64	25	85	52	56	190.5	297	7.3
10-1004-22	19	76	27	100	66	62	214.5	326	12.1