


G80 Shortening Clutch Sling Hook

- Forged super alloy steel-Quenched and tempered
- Individually proof test at 2.5 times working load limit.
- Fatigue tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection.
- Suitable for EN818-2 G80 chain.
- Safety factor 4:1
- Surface finish: Powder plastified.

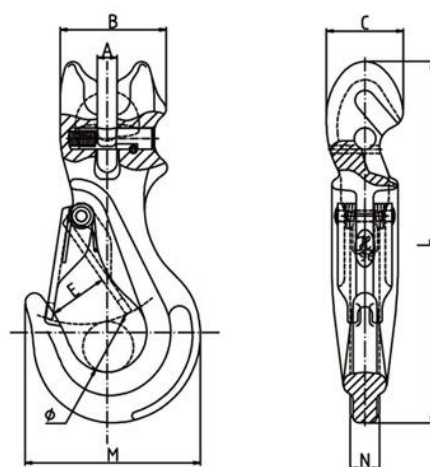

ITEM No.	WLL	Breaking Strength	Size (mm)								Weight
	T	T	A±1	B±1	C±1	E±1.5	M±2	N±1	L±3	Φ±3	kg
8-861-6	1.12	4.48	8	40	29	20	66	11	136.5	17	0.475
8-861-7/8	2	8	9.5	51	33.5	27	84	13	172.5	27	0.885
8-861-10	3.15	12.6	12	64.4	42	33	103	16	215	34	1.73
8-861-13	5.3	21.2	15	82	57.4	40	133.3	20	258	45	3.39
8-861-16	8	32	18.5	95	72	44	156.7	26.5	305	49	5.57