


Webbing Sling Connector

- Forged super alloy steel-Quenched and tempered
- Individually proof test at 2.5 times working load limit.
- Fatigue tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection..
- Safety factor 4:1
- Surface finish: Powder plastified.

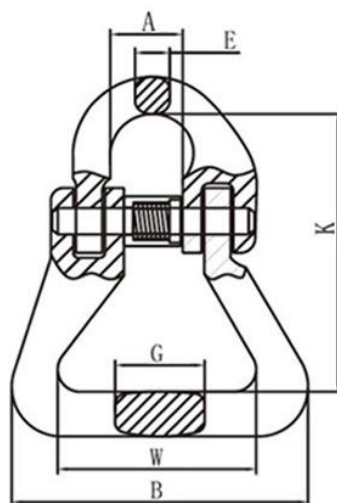

ITEM No.	WLL	B.L	Size(mm)						Weight
	T	T	A±1.5	B±2	K±2	W±3	G±2	E±1.5	kg
8-001-06	1.12	4.48	15	60	56	40	18	7	0.2
8-001-7/8	2	8	20	61.5	64	40	24	8.5	0.3
8-001-10	3.15	12.6	24	66	83	49	30.5	11	0.68
8-001-13	5.3	21.2	28	88	93.7	54	36.8	16.5	1.47
8-001-16	8	32	35	108	120	65.5	45.2	19.8	2.3
8-001-20	12.5	50	41	129	138	80	51.8	23	3.3
8-001-22	15	60	50	191	180	126	70	26	6.89
8-001-26	21.2	84.8	58	228.4	209.5	152	86	30	11
8-001-32	31.5	126	72.5	252	279	160	91	55	19