
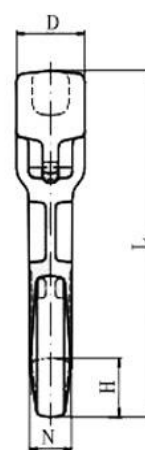


Webbing Sling Hook

- Forged super alloy steel-Quenched and tempered.
- 25% stronger than G80.
- Individually proof test at 2.5 times working load limit.
- Fatiuge tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection.
- Safety factor 4:1
- Surface finish: Powder plastified.

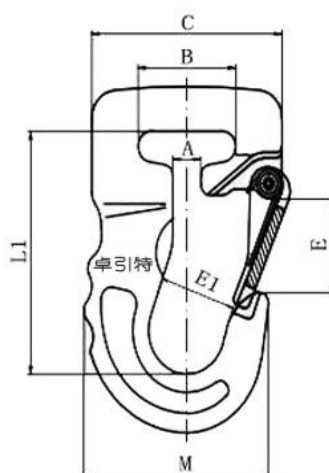

ITEM No.	Color	WLL	B.L	Size(mm)											Weight
		T	T	A±1	B±1	C±1	D±1	M±1	N±0.5	E±0.5	E1±0.5	L±3	L1±3	H±1	kg
10-1055-1T		1	4	11.5	40	78	28	75.7	17	33	30	124	87	21	0.73
10-1055-2T		2	8	18.5	44.5	91	35	90	21	40	39	148	103	27	1.27
10-1055-3T		3	12	21.5	54	114	45	110	26	41	48	175	115	33	2.3
10-1055-4T		4	16	40.5	76	133	56	139	32	50.5	60	223.5	147	40.5	4.73
10-1055-5T		5	20	40.5	76	133	56	139	32	50.5	60	223.5	147	40.5	4.73