


## Wire Rope Thimble

- According to DIN6899B.
- Extend the service life of pressed wire rope sling.
- Length is more precise than ordinary pressed wire rope sling.
- Wear resistance, reduce the cost of wire rope consumption.
- Suitable temperature:-40°C-150°C.

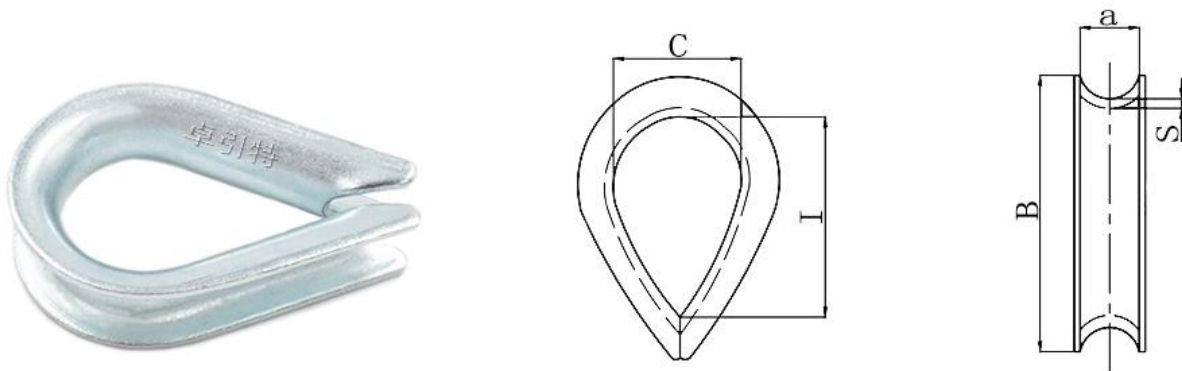

Model	Diameter mm	Size ( mm )					Weight ( kg )
		I	C	a	S	B	
TH-3	3	19	11.5	3	1.5	29	0.0058
TH-4	4	20.5	13	4	1.5	30.5	0.007
TH-5	5	22	14	5	1.5	33.5	0.01
TH-6	6	24	15	6	2	40	0.015
TH-7	7	29	18	7	2	43	0.02
TH-8	8	35	20	8	2	50	0.025
TH-10	10	39	24	10	2	58	0.035
TH-12	12	44	28.5	13	2.5	69	0.065
TH-13	13	50	30	13	2.5	75	0.07
TH-14	14	50	32	14	2.5	77	0.085
TH-15	15	57	34	15	2.5	83	0.08
TH-16	16	58	38	17	2.5	88	0.105
TH-17	17	53	39	17	3	91	0.185
TH-18	18	63	40	18	4	101	0.21
TH-20	20	71	45	20	4	113	0.25
TH-22	22	78	50	22	4	123	0.335
TH-24	24	91	56	24	5	136	0.495
TH-26	26	97	62	26	5	145	0.58
TH-28	28	114	70	28	5	165	0.675
TH-30	30	112	75	30	6	171	0.93
TH-32	32	130	79.5	33	6	189	1.065

TH-34	34	153	95	35	6	212	1.315
TH-36	36	164	95	36	6	228	1.44
TH-38	38	184	110	38	6	247	1.675
TH-40	40	190	117	42	8	258	2.45
TH-42	42	201	120	43	8	270	2.75
TH-45	45	250	135	50	8	325	3.78
TH-48	48	260	135	50	8	335	4
TH-50	50	267	135	53	8	345	4.5
TH-52	52	270	150	53	10	350	6.08
TH-56	56	270	150	57	10	350	6.1
TH-58	58	281	150	59	10	360	6.68
TH-62	62	300	150	63	10	375	7.09
TH-64	64	305	150	66	10	380	7.44
TH-66	66	308	150	68	10	385	7.86
TH-76	76	322	150	78	10	403	9.42