


Clevis Clutch with safety pin

- Forged super alloy steel-Quenched and tempered
- Individually proof test at 2.5 times working load limit.
- Fatiuge tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection.
- Suitable for EN818-2 G80 chain.
- Safety factor 4:1
- Surface finish: Powder plastified.



ITEM No.	WLL T	Breaking Strength T	Size (mm)										Weight kg
			A	B	C	D	E	Φ	L±3	M	N	S	
8-638-6	1.12	4.48	38	7.5	27	7.5	7.5	7.7	73	27	16	20.9	0.25
8-638-8	2	8	50	9.5	33	9.5	9.2	9.2	92	33	23	22.6	0.41
8-638-10	3.15	12.6	60	11.5	43	11.5	12	13.3	115	42.2	26	31	0.82
8-638-13	5.3	21.2	79	15	55	15	15.5	16.3	149	54	34	38.4	1.67
8-638-16	8	32	98	19	70	19	18.5	19.7	184	70	40	49.8	3.85

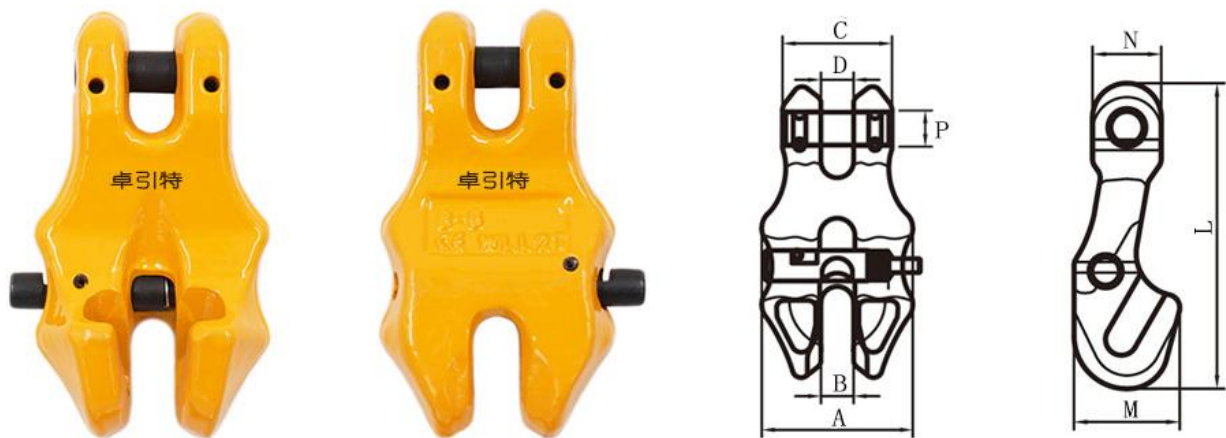