


Side pull lifting point

- Meet or exceed the requirements of the ASME B30.26 (ASME) specification.
- Manufactured from alloy steel, quenched and tempered.
- Rotates through 360° and pivot 90°.
- Bolts are Metric thread (ASME / ANSI B18.3.1M), specification is grade 12.9 alloy socket head screw per DIN EN ISO 4762.
- Proof tested to 2.5 times the WLL.
- Fatigue tested at 1.5 times working load limit for 20000 cycles.
- 100% magnaflux crack detection.
- Provide customized UNC thread.
- Provide customized lengthening screw.

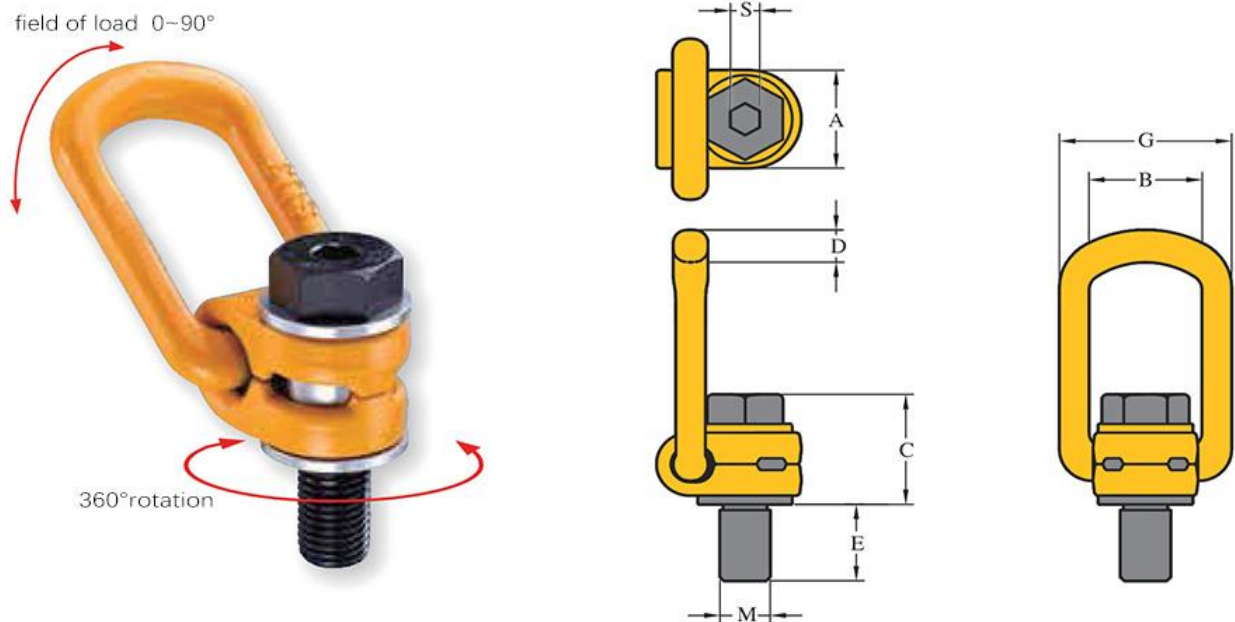

ITEM NO.	WLL	Torque N m	Size(mm)							Weight Kg
	T		A	B	C	D	E	G	S	
CD-M 8x1.25	0.3	30	30	35	35	14	11	45	6	0.36
CD-M10x1.5	0.63	60	30	35	36	14	16	45	6	0.38
CD-M12x1.75	1	100	36	40	44	18	18	68	8	0.71
*CD-M14x2.0	1.2	120	36	40	45	18	21	68	8	0.72
CD-M16x2.0	1.5	150	36	40	46	18	24	68	8	0.74
CD-M20x2.5	2.5	250	50	54	58	18	30	83	12	1.19
CD-M24x3.0	4	400	50	54	60	18	35	83	14	1.35
CD-M30x3.5	5	500	68	73	84	27	48	120	17	4.4
CD-M36x4.0	7	700	68	73	88	27	54	120	17	4.65
CD-M36x4.0	8	800	86	94	101	31	62	156	22	7.6
CD-M42x4.5	10	1000	86	94	104	31	72	156	24	8.2
CD-M42x4.5	15	1500	95	104	116	40	63	176	24	12.4
CD-M48x5.0	20	2000	95	104	120	40	74	176	27	13

*Special thread