


Forged Round Ring

- Forged super alloy steel-Quenched and tempered
- Breakage test
- 100% magnaflux crack detection.
- Safety factor 4:1
- Surface finish: Powder plastified.

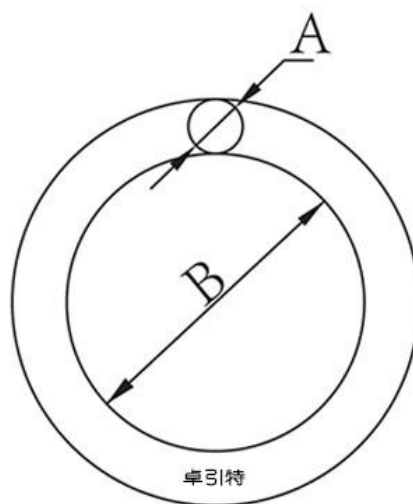

ITEM No.	WLL	Breaking Strength	A	B	Weight
	t	t	mm	mm	kg
8-038-3/4×4	1.8	7.2	19	101.6	0.84
8-038-7/8×4	3.5	14	22	101.6	1.2
8-038-7/8×6	3.5	14	22	152.4	1.6
8-038-1×6	4.5	18	25	152.4	2.3
8-038-1 1/8×6	6.5	26	28.5	152.4	2.87
8-038-1 1/4×6	9	36	31.8	152.4	3.6
8-038-1 1/4×8	9	36	31.8	203	4.8
8-038-1 1/4×10	9	36	31.8	254	5.6
8-038-1 3/8×6	9.5	38	35	152.4	4.5
8-038-1 3/8×8	9.5	38	35	203	6
8-038-1 1/2×6	10	40	38	152.4	5
8-038-1 1/2×8	10	40	38	203	6.8
8-038-1 1/2×10	10	40	38	254	8.22
8-038-1 3/4×9	16	64	44.4	228.6	10.33
8-038-2×13 1/2	20	80	50.8	343	18.7
8-038-2 3/4×13	32	128	70	340	37.34